


# NIMH - TECHNICAL DATA SHEET - MODEL ESP9000DH/FT

TECHNICAL DATA SHEET

## Battery General Specification :

- Model** - ESP9000DH/FT  
**Chemical Material** - Nickel Metal Hydride.  
**Description** - 1.2v Rechargeable battery  
 D size with FlatTop.

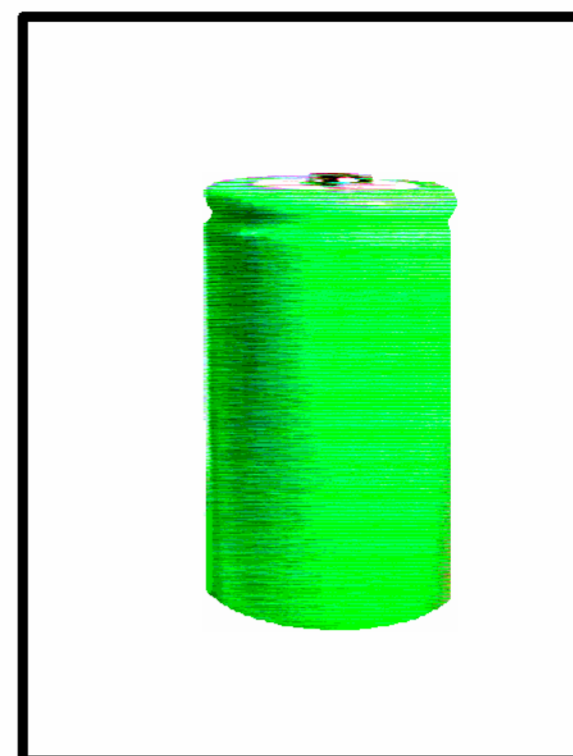

### Discharging:

#### (A) Discharge current.


- 1/ Discharged at 0.2CA, Provide 80% at EPV 1.2V 98% of nominal capacity at EPV 1.1V.
- 2/ Discharged at 0.5CA, Provide 70% at EPV 1.2V 95% of nominal capacity at EPV 1.1V.
- 3/ Discharged at 1CA, Provide 60% at EPV 1.2V 93% of nominal capacity at EPV 1.1V.
- 4/ Discharged continuously at 1C, for 2 hours, No explosion or leakage.

#### (B) Capacity and Cycle ( 500 to 800 cycles)

- Charge at 0.1C, discharge at 0.2C; 100% nominal capacity.  
 Charge at 1C, discharge at 1C; minimum 95% nominal capacity.

## Physical and Electrical Specifications.

DIMENSIONS WITH SLEEVE

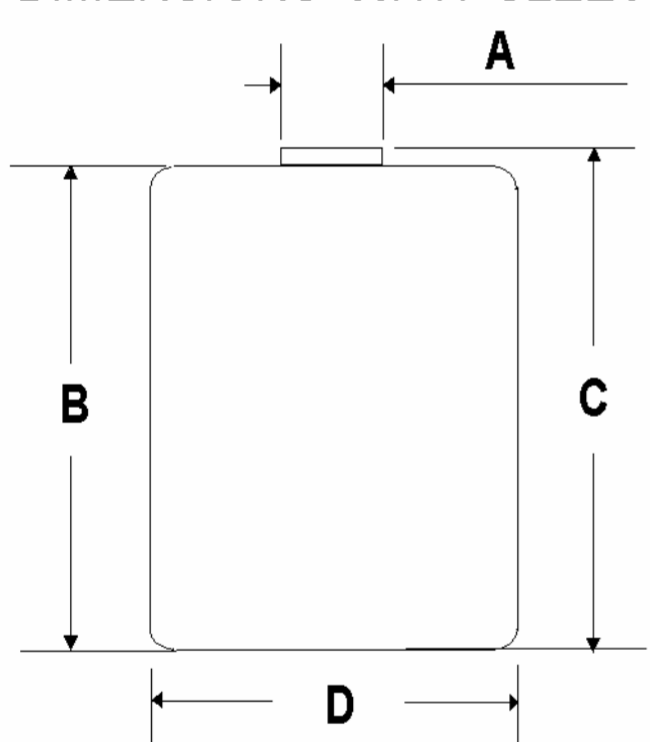

<b>A</b>	07.0mm +/- 0.2mm
<b>B</b>	58.5mm +/- 0.2mm
<b>C</b>	59.0mm +/- 0.5mm
<b>D</b>	32.0mm +/- 0.2mm

Nominal Voltage		1.2v	
Typical Capacity		9000mAh	
Weight		155g	
Internal resistance.		7m Ω	
Charge	Standard	900mA x 15hrs	
	Quick	2700mA x 5hrs	
	Rapid	5200mA x 2.5hrs	
Discharge	900mA	64min	
	1800mA	60min	
	9000mA	55min	
Ambient temperature	Charge	Standard	0 <sup>0</sup> to 45 <sup>0</sup> C
		Quick	0 <sup>0</sup> to 40 <sup>0</sup> C
	Discharge		-20 <sup>0</sup> to 65 <sup>0</sup> C
	Storage		-20 <sup>0</sup> to 45 <sup>0</sup> C

### Discharge Temperature at 0.2CA

- 1/ At 20<sup>0</sup>C, 100% nominal capacity.
- 2/ At 0<sup>0</sup>C, 90% nominal capacity.
- 3/ At 60<sup>0</sup>C, Or -20<sup>0</sup>C, 85% nominal capacity.
- 4/ Charge retention for 30 days at 20<sup>0</sup>C, cell can provide 70% nominal capacity discharged at 0.2CA.

**CELLS MANUFACTURED TO GB/T19001:2000 - ISO9000/9001: 2000 STANDARD & CONFORMITY**

Cell & Battery specifications are subject to modifications without prior notice. All the above information is generally descriptive and is not intended as a guarantee or warranty.

**ESP** SPECIAL BATTERIES LTD  
 565 Uppingham Rd  
 Leicester. LE5 6QA  
 England.

Tel 0116 2413796  
 Fax 0116 2416519  
 Email - [info@espspecialbatteries.co.uk](mailto:info@espspecialbatteries.co.uk)

ESP9000DH/FT