# NICAD - TECHNICAL DATA SHEET- MODEL ESP2800C

# **Battery General Specification:**

Model - ESP2800C

Chemical Material - Nickel Cadmium.


Description - 1.2v Rechargeable battery C size with Pip top.



#### **Discharging:**

- (A) Discharge current.
- 1/ Discharged at 0.2CA, Provide 80% at EPV 1.2V 98% of nominal capacity at EPV 1.1V.
- 2/ Discharged at 0.5CA, Provide 70% at EPV 1.2V 95% of nominal capacity at EPV 1.1V.
- 3/ Discharged at 1CA, Provide 60% at EPV 1.2V 93% of nominal capacity at EPV 1.1V.
- 4/ Discharged continuously at 1C, for 2 hours, No explosion or leakage.
- (B) Capacity and Cycle ( 500 to 800 cycles)
  - Charge at 0.1C, discharge at 0.2C; 100% nominal capacity.
  - Charge at 1C, discharge at 1C; minimum 95% nominal capacity.

### Physical and Electrical Specifications.

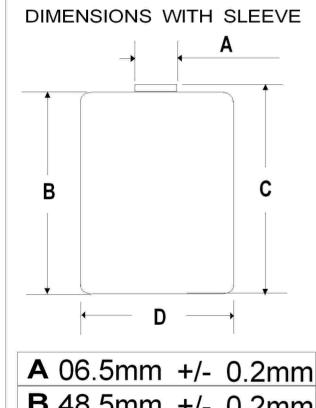

т/-	0.211111
+/-	0.5mm
+/-	0.2mm
	+/-

Nominal Voltage			1.2v		
Typical Capacity			2800mAh		
Weight			75g		
Internal resistance.			15m Ω		
Charge	Standard		280mA x	15hrs	
	Quick		840mA x	5hrs	
	Rapid		1680mA x	2.5hrs	
Discharge	280mA		64min	(0.1C)	
	560mA		60min	(0.2C)	
	2800mA		55min	(1C)	
Ambient temperature	Charge	Standard	0 <sup>0</sup> to 45	0C	
		Quick	$0^0$ to 40	$^{0}C$	
	Discharge		-20 <sup>0</sup> to 65 <sup>0</sup> C		
	Storage		-20 <sup>0</sup> to 45 <sup>0</sup> C		

## Discharge Temperature at 0.2CA

- 1/ At 20<sup>0</sup>C, 100% nominal capacity.
- 2/ At 0<sup>0</sup>C, 90% nominal capacity.
- 3/ At 60<sup>0</sup>C, 0r -20<sup>0</sup>C, 85% nominal capacity.
- 4/ Charge retention for 30 days at 20<sup>0</sup>C, cell can provide 70% nominal capacity discharged at 0.2CA.

CELLS MANUFACTURED TO GB/T19001:2000 - ISO9000/9001: 2000 STANDARD & CONFORMITY Cell & Battery specifications are subject to modifications without prior notice. All the above information is generally discriptive and is not intended as a guarantee or warranty.

